BRUHATH BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

NAME OF THE WORK IMPROVEMENTS TO DRAIN AT SHESHADRI LAYOUT, BAGALAGUNTE WARD NO. 14

					Est. Cost		5000000.00	
Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
1	2	3	4	5	6	7.00	8	9
I	For Drain							
1	KSRRB 300-2 : Earthwork excavation by manual means in hard soil involving an average horizontal throw upto 2 metres and an average lift upto 0.5m, excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications. MORTH /Chapter 3 (Page No.142, Item No. 19.2)							
	for CC drain	2	200.00	1.20	1.20	576.00		
	Culvert	4	6.00	1.80	1.20	51.84		
						627.84	119.78	75203.00
							Per Cum	
	Basic Rate	113.00						
	Add 6% A.W	6.78						
	Total	**119.78**						
2	KSRB 4 - 1.3 : Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180 kgs, with 40 mm and down size graded granite metal coarse aggregates @ 0.85 cum and fine aggregates @ 0.57 cum machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation and plinth,including cost of all materials, labour HOM of machinery curing complete as per specifications. Specification No.KBS 4.1, 4.2 (Page No.12, Item No. 4.3)							
	For drains	2	200.00	1.20	0.15	72.00		
	Culvert	4	6.00	1.80	0.15	6.48		
						78.48	5159.02	404880.00
							Per Cum	
	Basic Rate	4867.00						
	Add 6% A.W	292.02						
	Total	**5159.02**						

Scanned by CamScanner

Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
3	KSRB 4-6.4 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached pilasters, buttresses, plinth and string courses cost of all materials, labour complete as per specifications. Specification No.KBS 4.6.2 (Page No.15, Item No. 4.31)							
		8	200.00	0.90		1440.00		
						1440.00	310.58	447235.00
	Basic Rate	293.00					Per Sqm	
	Add 6% A.W	17.58						
	Total	**310.58**						
4	KSRB 4.9.2 : Providing T.M.T steel reinforcement for R.C.C. work including straightening, cutting, bending, hooking, placing in position, lapping and/or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. for TMT Bars Fe 500 Specification No.KBS 4.6.3 (Page No.17, Item No. 4.46.2)							
		2	2000.00	2.70		10800.00		
		2x18	200.00	1.00		7200.00		
	for culvert covering slabs	2.81	x 80 kgms / Cum			224.80		
						18224.80		
				18224.80	/ 1000	18.22		
					Say	**18.22**	64243.42	1170823.00
							Per Tonne	
	Basic Rate	60607.00						
	Add 6% A.W	3636.42						
	Total	**64243.42**						

Scanned by CamScanner

Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
5	KSRB 4.2.2 : Providing and laying in position reinforced cement concrete of design mix M 20 with OPC cement @ 320 kgs, with 20mm and down size graded granite metal coarse aggregates @ 0.878 cum fine aggregates @ 0.459 cum, with superplastisiser @ 3 lts confirming to IS 9103 - 1999 Reaffirmed - 2008, machine mixed, concrete laid in layers not exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, lintels, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery curing, complete as per specifications.Specification No.KBS 4.1, 4.6 (Page No.13, Item No. 4.11)							
	for Drain bed	2	200.00	0.90	0.15	54.00		
	for side wall	4	200.00	0.15	0.90	108.00		
	side concrete	2	200.00	0.20	0.25	20.00		
	for covering slabs culvert	4	6.00	1.50	0.25	9.00		
						191.00	6371.66	1216987.00
	Basic Rate	6011.00					Per Cum	
	Add 6% A.W	360.66						
	Total	**6371.66**						
6	KSRB 5.3-3 : Providing and constructing granite / trap/ basalt size stone masonry in basement with cement mortar 1:6, edges of stones chistle dressed in courses not less than 15 cms high, bond stones at two m. apart in each course including cost of materials, labour, curing, complete as per specifications.KBS 5.1.13 (Page No.23, Item No. 5.9)							
	Culvert	8	6.00	0.45	0.75	16.20		
						16.20	5305.30	85946.00
	Basic Rate	5005.00					Per Cum	
	Add 6% A.W	300.30						
	Total	**5305.30**						

Scanned by CamScanner

Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
7	KSRB 4 - 1.2 : Providing and laying in position plain cement concrete of mix 1:3:6 with OPC cement @ 220 kgs, with 40 mm and down size graded granite metal coarse aggregates @ 0.892 cum and fine aggregates @ 0.465 cum machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation and plinth, cost of all materials, labour HOM of machinery curing complete as per specifications. Specification No.KBS 4.1, 4.2 (Page No.12, Item No. 4.2)							
	Culvert	8	6.00	0.45	0.10	2.16		
						2.16	5348.76	11553.00
	Basic Rate	5046.00					Per Cum	
	Add 6% A.W	302.76						
	Total	**5348.76**						
8	KSRB 15.1.3 : Providing ruled pointing to course stone masonry with cement mortar 1:3, 20mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, curing complete as per specifications. (Page No..113, Item No. 15.3)							
	Culvert	8	6.00		0.75	36.00		
						36.00	103.88	3740.00
	Basic Rate	98.00					Per Sqm	
	Add 6% A.W	5.88						
	Total	**103.88**						
9	Providing and fixing Pre cast solid concrete kerb stones made out of CC 1:2:4 and finished with CM 1:3 plastering and finishing cutting etc., complete. of size 450 x 200 x 400 mm (Page No.25, Item No. 5.29.1)							
		2	200.00			400.00		
						400.00		
				400.00	/ 0.45	**888.89**		
					Say	**889.00**	385.84	343012.00
							Nos	
	Basic Rate	364.00						
	Add 6% A.W	21.84						
	Total	**385.84**						

Scanned by CamScanner

Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
10	KSRB 15-19.1 : Providing and applying ready mix priming coat over concrete / masonry / asbestos cement sheet / plastered surfaces including preparing the surface after throughly cleaning of oil, grease, dirt and other foreign matter, and sand papering including cost of materials, labour, complete as per specifications. (Page No.122, Item No.15.80)							
		2	200.00	0.45		180.00		
						180.00	27.56	4961.00
	Basic Rate		26.00				Per Sqm	
	Add 6% A.W		1.56					
	Total		**27.56**					
11	KSRB 15-19.2 : Providing and applying spary painting in two coats (excluding priming coat) over concrete / masonry / asbestos cement sheet / plastered surfaces with flat wall paint of approved brand to give even shade after cleaning the surface of all dirt, dust and other foreign matter, and sand papering including cost of materiasl, labour, complete as per specifications. (Page No.122, Item No.15.81)							
	Qty vide item no 19							
						180.00		
						180.00	69.96	12593.00
	Basic Rate		66.00				Per Sqm	
	Add 6% A.W		3.96					
	Total		**69.96**					
12	Supplying and fixing precast reinforced conceret slabs 10cm thick of mix M20 using 20mm and sownsize graded grantite metal using reinforecement 100mm dia steel at 150mm C/C both ways cost, transportation, hire charges of machinerym machine cuttng the vertical face to get plain even surface etc., complete with all lead and lift conveyance charges, labour charges inclusive of cost of all materials							
		2	200.00	0.90		360.00		
		348	0.90	0.60		187.92		
						547.92	1698.00	930368.00
							PerSqm	

Scanned by CamScanner

Sl. No	Description	Dimensions				Qty.	Rate	Amount
		No.	L.	B.	D			
27 13	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4KM a) Basic rate for haulage of materials as per item No. 17.4/ KSRRB: M100-4,1 … Rs. 2.00 Tonne / Km b) Average earth of work 1.28 Tonne / Km Rs, 2.00 c) Add loading and unloading Page. No. 133 Item No. 17.1 PWD SR 2016-17							
	Qty vide item no 1					170.64	62784	
	Qty vide item no 9 & 21	1147.00		x 0.50		1219.00		53733.00
	Loading and unloading Charges	68.00				1389.64	85.65	119020.00
	Lead 4 KMs 2.5x1.28x4	12.80				62784.	Per Cum	
		80.80						
	Add A W 6 %	4.85						
	Tota	85.65						4761074.00
							Sub Total	4760429.00
28	Tender premium							238054.00 238021.00
29	Miscellaneous and unforeseen charges							1550.00
							GRAND TOTAL Rs.	5000000.00

CERTIFICATE

1 The work spot have been inspected by me and work is found to be necessary.
2 This estimate is prepared as per the PWD & IWTD CSR of 2016-17
3 This work is not split up
4 The provisions were made in this estimate are adequete and essential
5 This works comes under BBMP Limits

Asst.Engineer
Ward No. 14

Asst.Executive Engineer
T.Dasarahalli Sub Division
B.B.M.P.

Executive Engineer
Dasarahalli Division
B.B.M.P.

ನಂ. EE/DD/AE/67/17-18 ದಿನಾಂಕ : 01-09-17
ರೂ. Fifty lakhs (Rupees Fifty lakhs only)
ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ. EE/TS/175/17-18 ದಿನಾಂಕ : 25/09/2017
ರೂ. Rs. 50-00 lakh only (Rs. fifty lakhs only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂ
ತಾಂತ್ರಿಕ ಸಹಾಯಕರು
ಮುಖ್ಯ ಅಭಿ
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Scanned by CamScanner

Sheshadri Layout, Work Spot

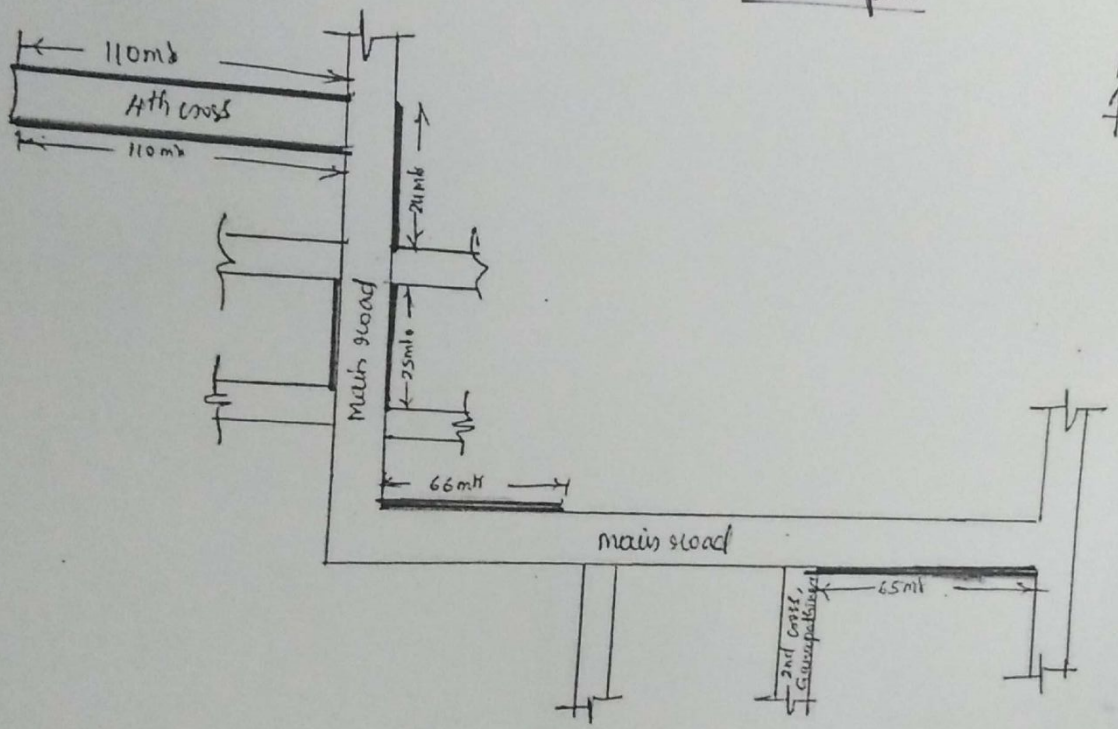

N

Index

→ workspot

Sketch is not to Scale

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರ
ಟಿ.ದಾಸರಹಳ್ಳಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿಬಿಎಂಪಿ
ಬೆಂಗಳೂರು

ಕಿ.ಅ (ದಾ.ವಿ)

Scanned by CamScanner